R Right-hand thread

BOLT ANCHOR
With internal thread
high-strength steel, galvanized
with stainless steel spreader
suitable only for concrete



No. 30803–
0800–02

TVM MORTAR SH PERFORATED ANCHOR
For hollow and solid walls



No. 30803–
0800–05
Mastic gun: 0800–051

RAMPA SCREW-IN NUT FOR WOOD
Galvanized steel with hexagon socket
Type SK



No. 30803–	
0800–04	~ DIN 7965

EYE BOLT WITH WASHER



No. 30888–	
0800–05	1.4404 / AISI 316

R Right-hand thread

HEXAGON HEAD CAP SCREW
DIN 933



No. 30843–	c	
0800–016	16	1.4404 / AISI 316
0800–025	25	
0800	40	

SOCKET HEAD SCREW
DIN 912



No. 30844–	c	
0800–016	16	1.4404 / AISI 316
0800–025	25	
0800	35	

WASHER
DIN 433



No. 30896–
0800

WASHER FOR WOOD
DIN 9021 B



No. 30896–
0800–24

GreenGuide overload clamp:
see description on **page 19 + 29**

TVM mortar
is a two-component synthetic resin mortar. A mounting kit consists of:

- 1 cartridge 150 ml with press barrel
- 2 mixer tube
- 6 SH perforated anchors

The perforated anchor is needed only for hollow walls. The threaded rod can be cemented directly into solid walls.

VC3 thread lock fluid
Lacquer-like coating which contains two separate micro-encapsulated components. The locking action becomes effective when a male and female thread pair is tightened. The connection becomes vibration-proof. The thread lock fluid **prevents self-loosening.**

Thread roots must be filled at least 2/3.



VC3 THREAD LOCK FLUID

No. 30879–
0001

HEXAGON NUT
DIN 934

No. 30892–
0800

DOME NUT
DIN 1587

No. 30894–
0800

LOCK NUT
DIN 985



No. 30892–
0800–02

ANGLE SECTION
Dimensions and holes to your specifications
Length max. 2500 mm

Costs per cut: **No. 20800–**0005 / Costs per drilling: **No. 20800–**0006

No. 30922–	b1/b2	
3030	30/30	1.4404 / AISI 316
4040	40/40	

FLAT SECTION
Dimensions and holes to your specifications
Length max. 2500 mm

Costs per cut: **No. 20800–**0005 / Costs per drilling: **No. 20800–**0006

No. 30922–	b	
0030	30	1.4404 / AISI 316
0040	40	

SECTION CONNECTOR

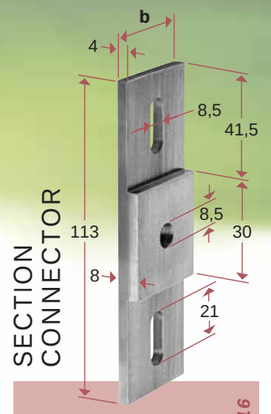

No. 30922–	b	
3004	30	1.4404 / AISI 316
4004	40	

HORIZONTAL ROD
Ø 3.7
Length max. 2500 mm

Costs per cut: **No. 20800–**0002

No. 30922–
0400–00

CLIMBER STUD
UV-resistant plastic
Colour grey

No. 30906–	
0400	PVC

GREENGUIDE OVERLOAD CLAMP
Slip element for vigorous twiners

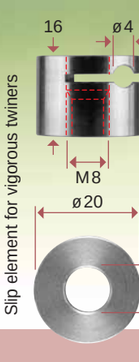

No. 30920–
0400–10

SPACER WASHERS
For GreenGuide eyes



No. 30922–	b	
0800–02	4	1.4404 / AISI 316
0800–01	6	
0800	12	

Technical data subject to change.
All rights reserved. © 1988 / 02 by Jakob AG Switzerland. Rev.1